

Frequency Range: 2.0~50MHz

Application of Ceramic Resonator:


- Best choice for Remote control
- UPS
- Mouse



Electrical Specification:

Model	Frequency Range (MHz)	Frequency Accuracy (25°C)	Stability in Temperature (-20 ~ +80°C)	Aging For Ten Years (%)
NRDZTACC□MG	2.00 ~ 6.99	±0.5%	±0.3%	±0.3
NRDZTACS□MT	7.00 ~ 13.00	±0.5%	±0.3%	±0.3
NRDZTACV□MT	8.00 ~ 13.00			
NRDZTACS□MX	13.01 ~ 50.00	±0.5%	±0.3%	±0.3
NRDZTACV□MX	16.00 ~ 50.00			

DIMENSIONS:

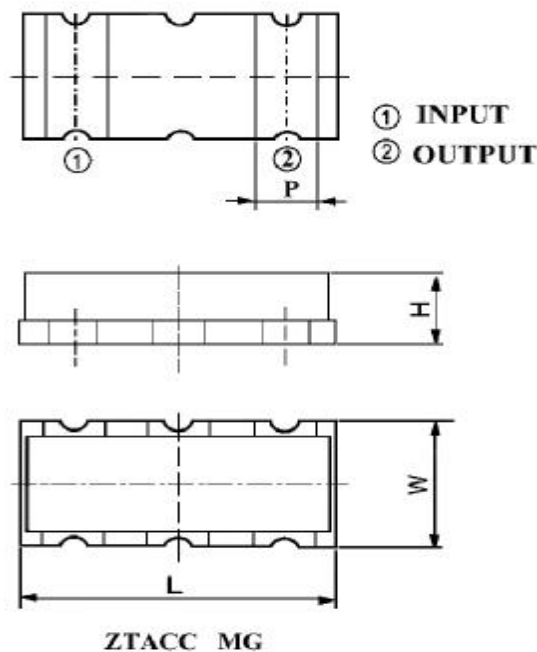

CODE TYPE	DIMENSIONS (MM)				
	L	W	H	P	T
ZTACC□(MG)	7.4±0.2	3.4±0.2	1.8±0.2	1.2±0.2	5.0±0.2
ZTACS□(MT/MX)	4.7±0.2	4.1±0.2	1.6±0.2	0.8±0.2	3.9±0.2
ZTACV□(MT/MX)	3.7±0.2	3.1±0.2	1.0±0.2	0.7±0.2	3.0±0.2

SHENZHEN YIJIN ELECTRONICS CO: LTD TEL: 0755-27876565

18924600166 QQ: 857950243 <http://www.vc-tcxo.com>