

CRYSTAL RESONATOR

Seam Sealed Ceramic Package


HSX111SA Series



Features:

- Ultra-miniature size and low profile
(1.65×1.25×0.4t)
- High precision and reliability with excellent heat resistance.
- Optimal solution for smartphone applications with limited design space, miniaturized wireless module devices, RFID application, and other consumer based products.

Dimension (mm):

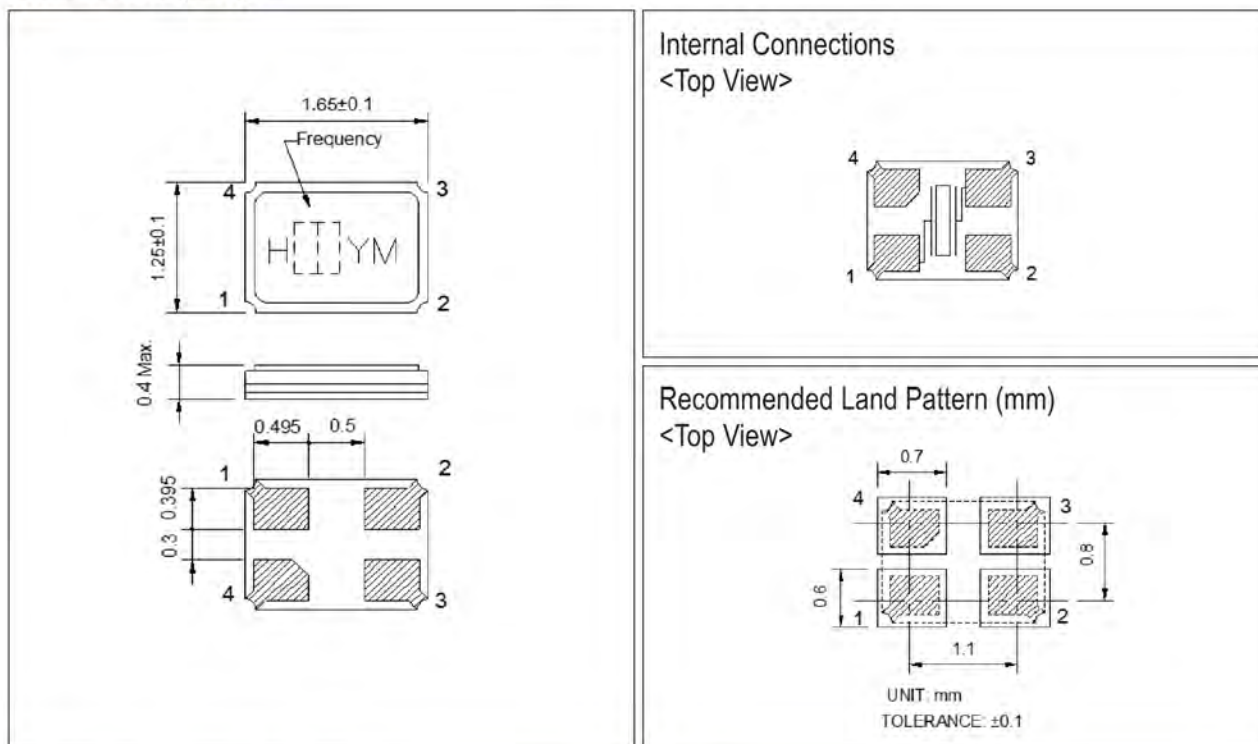

Standard Specification:

ITEM	TYPE	HSX111SA
Frequency Range		24~40MHz 40~54MHz
Mode		Fundamental
Frequency Tolerance		±7ppm ~ ±50ppm (at. 25°C) , or Specify
Frequency Stability over Operating Temperature Range		±10 ppm, or Specify
Operating Temperature		-10 ~ +60 °C , or Specify
Load Capacitance		Series, 8pF, 10pF, 12pF, or Specify
Drive Level		10μW (100μW Max.)
Equivalent Series Resistance		150ΩMax. 100ΩMax.
Storage Temp. Range		-40 ~ +125°C

*Packing Unit: 3,000pcs/Reel.

SHENZHEN YIJIN ELECTRONICS CO: LTD TEL: 0755-27876565

18924600166 QQ: 857950243 <http://www.vc-tcxo.com>