

CRYSTAL RESONATOR

Seam Sealed Ceramic Package


HSX321S Series



Features:

- Mainstream miniature SMD type with a mature industry production history, current usage spreads over a wide range of applications.
- High precision and reliability with excellent heat resistance.
- Common solution for RF applications, module devices, and other consumer-based mobile products.

Dimension (mm):

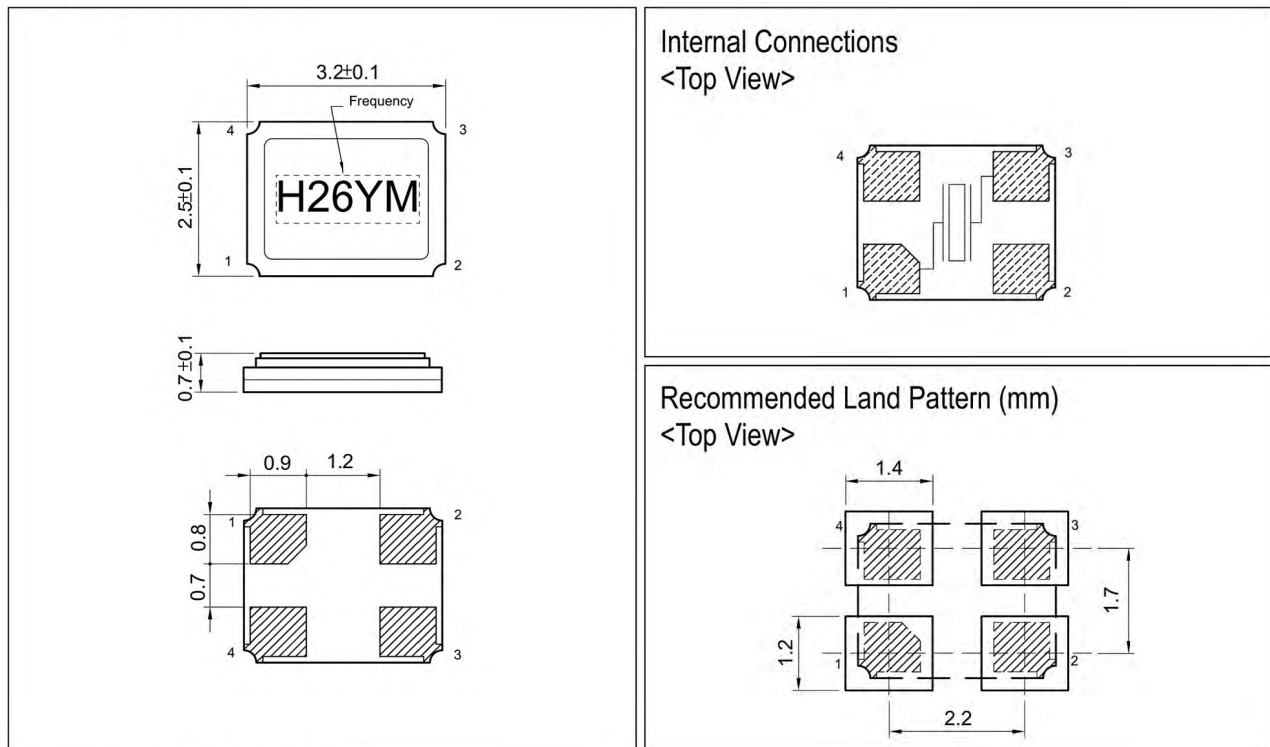

Standard Specification:

ITEM	TYPE	HSX321S			
		10MHz	12~20MHz	20~28MHz	28~54MHz
Frequency Range					
Mode		Fundamental			
Frequency Tolerance		$\pm 7\text{ppm} \sim \pm 50\text{ppm}$ (at. 25°C)			
Frequency Stability over Operating Temperature Range		$\pm 10\text{ppm}$, or Specify			
Operating Temperature		$-10 \sim +60^{\circ}\text{C}$, or Specify			
Load Capacitance		Series, 8pF, 10pF, 12pF or Specify			
Drive Level		10 μW (100 μW Max.)			
Equivalent Series Resistance		150 Ω Max.	80 Ω Max.	60 Ω Max.	50 Ω Max.
Storage Temp. Range		$-40 \sim +125^{\circ}\text{C}$			

*Packing Unit: 3,000pcs/Reel.

SHENZHEN YIJIN ELECTRONICS CO: LTD TEL: 0755-27876565

18924600166 QQ: 857950243 <http://www.vc-tcxo.com>