


SMD TYPE CERAMIC (SMD 7 x 5)



Application of SMD crystal:

- Radio communication
- TCXO
- Office automation equipment
- GPS
- Audio-visual equipment

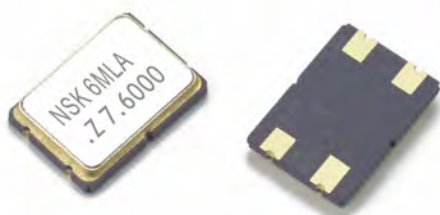

{Features}

Seam welding
Excellent solderability
Automatic and perfect packing due to emboss taping
Excellent vibration resistance & shock resistance
Rohs compliant / Pb free

Electrical Specification:

Model	NXD-75
1.Frequency	
Frequency Range	6.0 ~ 125.000 MHz
Frequency Tolerance at 25 ℃ ± ℃	±10 ~ ±100 ppm (TYP.)
Frequency Stability Over Operating Temp Range	±10 ~ ±100 ppm (TYP.)
2.Environmental Condition	
Operating Temp Range	-10 ℃~ +60 ℃,-20 ℃~ +70 ℃ or customer requirement
Storage Temp Range	-40 ℃ ~ +85 ℃
Aging Rate	±3ppm/year
3.Electrical Specifications	
Test Circuit	S&A 250B
Load Capacitance	6 pF ~ 32 pF, series or special
Drive Level	1uW ~ 100uW or special
Shunt Capacitance	7.0pF max


Equivalent Series Resistance(ESR) VS Frequency:

Frequency (MHz)	Oscillation Mode	NXD-75
6.0 ~ 10.0	Fundamental	110 Ω
10.1 ~ 22.0	Fundamental	80 Ω
22.1 ~ 40.0	Fundamental	40 Ω
40.1 ~ 125.0	3rd overtone	80 Ω


SHENZHEN YIJIN ELECTRONICS CO: LTD TEL: 0755-27876565

18924600166 QQ: 857950243 <http://www.vc-tcxo.com>

Dimensions (mm):

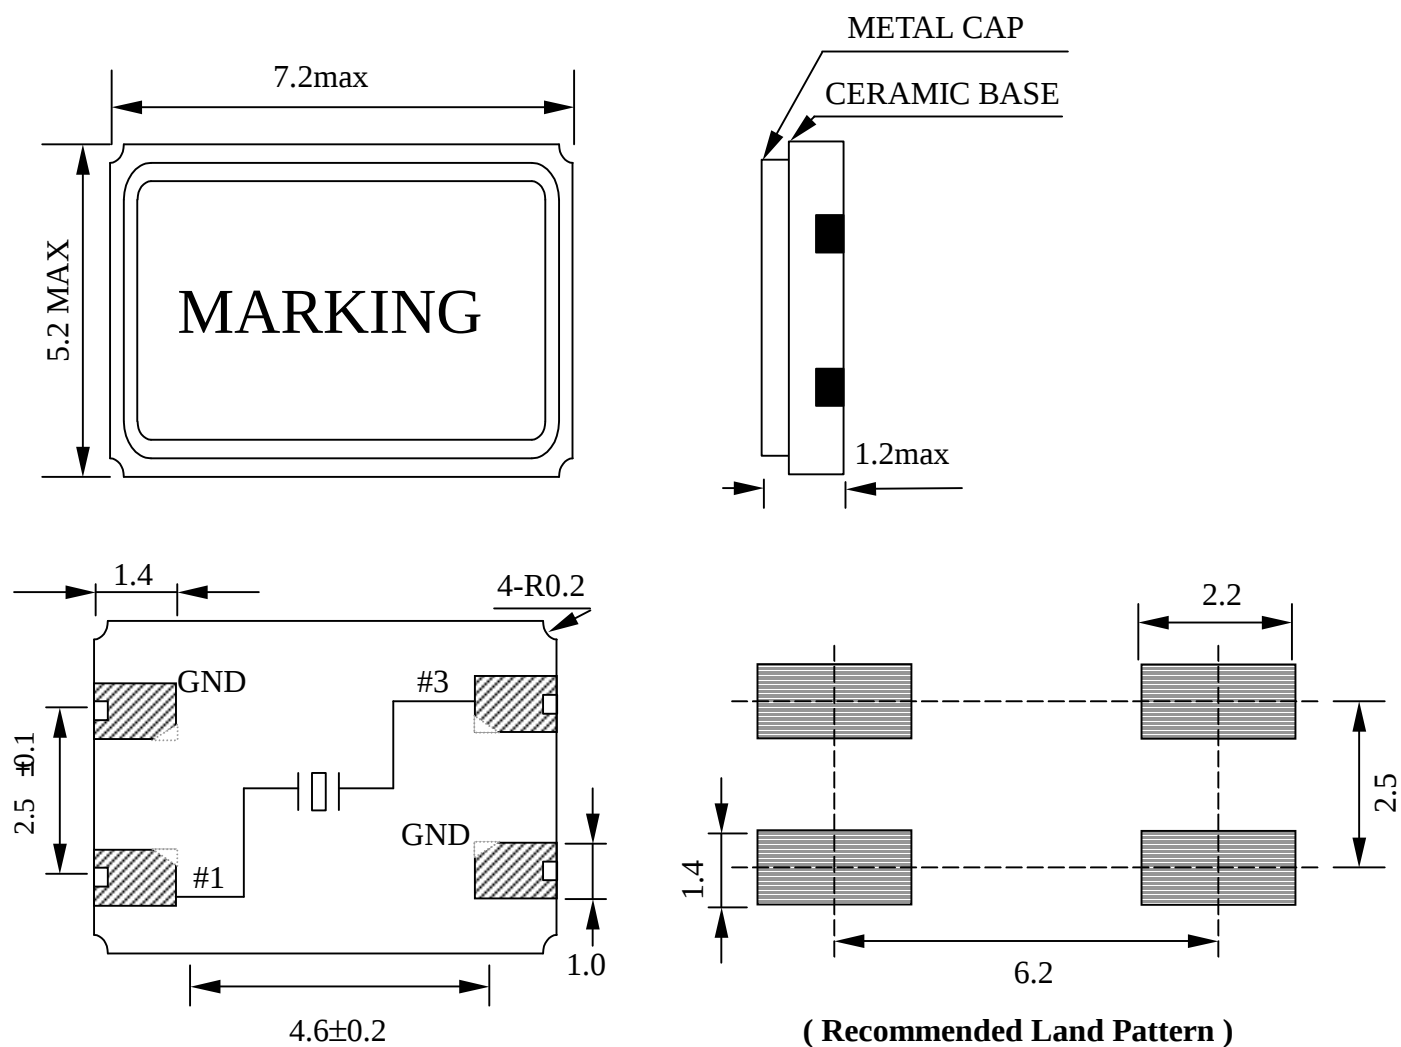

Tape specification: (Unit: mm)

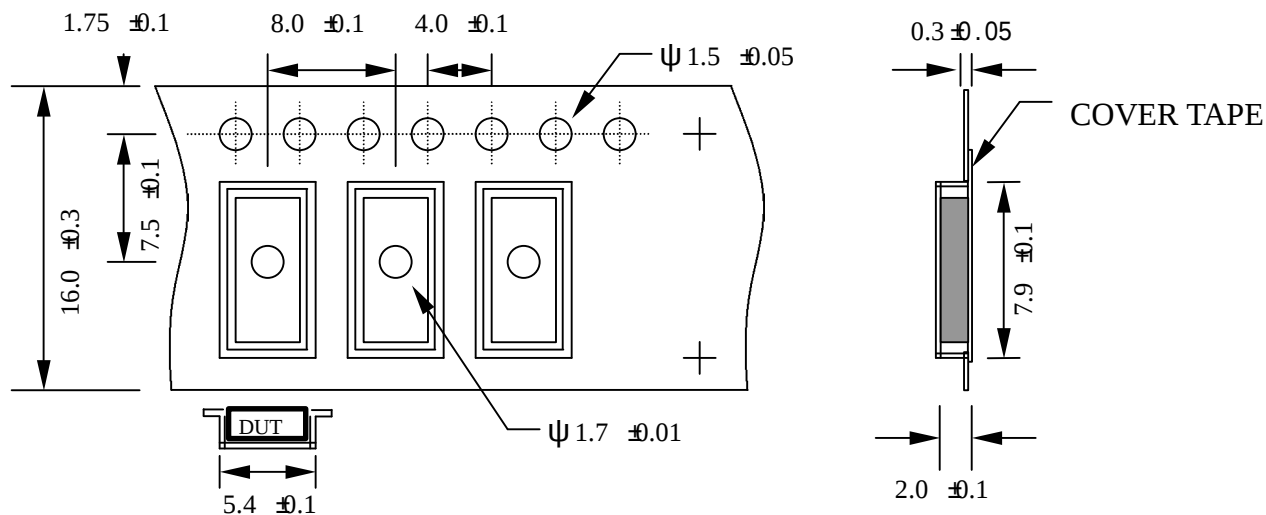

SHENZHEN YIJIN ELECTRONICS CO: LTD TEL: 0755-27876565

18924600166 QQ: 857950243 <http://www.vc-tcxo.com>