

## SMD TYPE CERAMIC (SMD 8 x 4.5)



### Application of SMD crystal:

- Blue tooth
- PDA
- Notebook
- Digital camera
- MP3
- Wireless Lan



### {Features}

1.1mm thickness is equal to SMD-type IC  
Excellent reliability and environment capability  
High-density mounting-type SMD  
Excellent vibration resistance & shock resistance

### Electrical Specification:

Model	NXM-84-APA-GLASS
<b>1.Frequency</b>	
Frequency Range	8.0 ~ 125.000 MHz
Frequency Tolerance at 25 °C ± °C	±0 ~ ±100 ppm (TYP.)
Frequency Stability Over Operating Temp Range	±0 ~ ±100 ppm (TYP.)
<b>2.Environmental Condition</b>	
Operating Temp Range	-10 °C~ +60 °C, -20 °C~ +70 °C or customer requirement
Storage Temp Range	-40 °C ~ +85 °C
Aging Rate	±1ppm , ±2ppm , ±3ppm/year
<b>3.Electrical Specifications</b>	
Test Circuit	S&A 250B
Load Capacitance	6 pF ~ 32 pF, series or special
Drive Level	1uW ~ 100uW or special
Shunt Capacitance	7.0pF max


### Equivalent Series Resistance(ESR) VS Frequency:

Frequency (MHz)	Oscillation Mode	NXM-84-APA-GLASS
8.0 ~ 11.0	Fundamental	110
11.1 ~ 22.0	Fundamental	80
22.1 ~ 40.0	Fundamental	50
40.1 ~ 125.0	3rd overtone	80

SHENZHEN YIJIN ELECTRONICS CO: LTD TEL: 0755-27876565

18924600166 QQ: 857950243 <http://www.vc-tcxo.com>

**Dimensions (mm):**

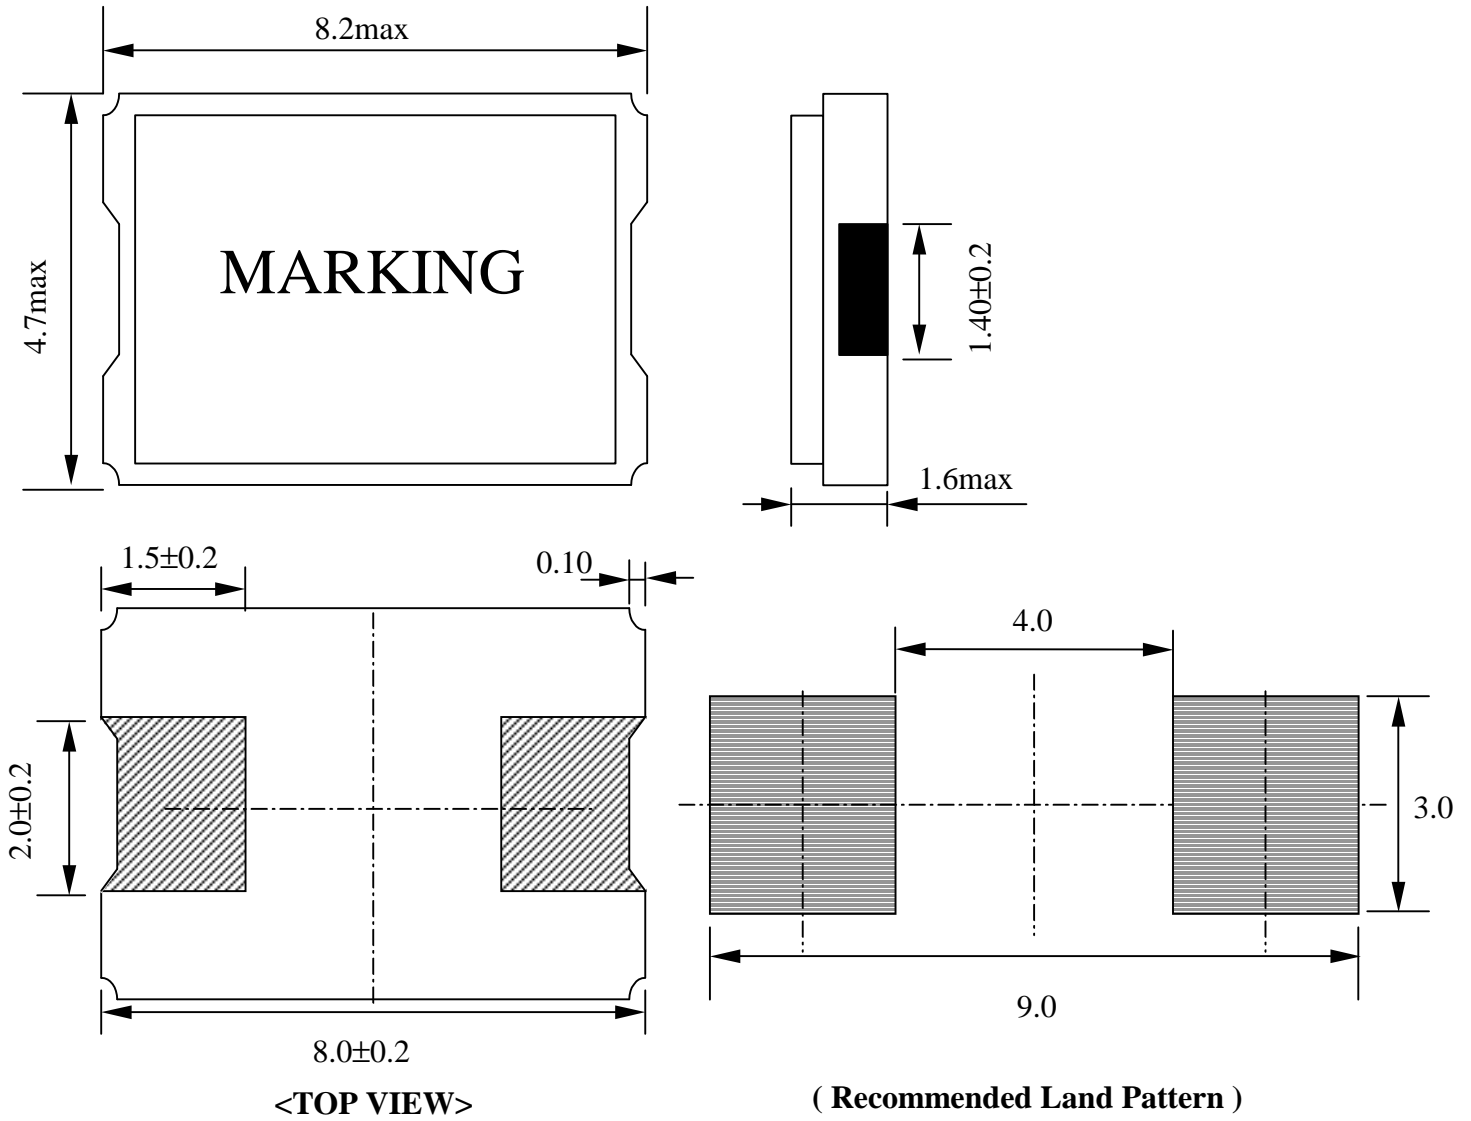

**Tape specification: (Unit:mm)**

